



Böcker - Løft og tilkomst



Junior Furniture Lift

The Böcker Junior Furniture Lift

Full performance and minimum required space

The Junior series of Böcker's Furniture Lifts is the compact alternative for efficient removals. These days, cities are often crowded and there is hardly any space for removal companies to set up their equipment. Many flats can only be reached through backyards or narrow lanes where standard-sized furniture lifts are completely oversized. The Böcker Junior Furniture Lift is the ideal solution to these obstacles. Designed to operate under challenging circumstances, it offers full performance at a minimum required space.

Advantages at a glance

- Lifting heights up to 24 m
- Payload max. 250 kg with lifting speeds up to 48 m/min
- Powered by a 230 Volt electric motor (standard) or optional by a high-performance Honda petrol engine
- Chassis with a special protective paint (novagrey) and a low balance point for a top driving stability
- Motor easily accessible and easy to maintain
- Vertically and horizontally adjustable guide rails for a extremely smooth rail and carriage operation
- Minimum required space, also while machine is set up
- Fits through any kind of narrow line, even through the back entrance due to its retractable axle
- Retractable and removable ball shaped coupling for extremely narrow situations

The Böcker furniture platforms

- Large and flat platform surface offering sufficient space even for bulky goods
- Side walls 90° and 180° foldable as well as removable-rotatable and extendible platforms (optional)
- Platform „Basic“ with with pluggable side walls made of side wall profiles incl. single-handed adjustment
- Platform „Premium“ with folding side walls made of side wall profiles incl. single hand adjustment
- Infinitely variable spindle (optional) for absolutely horizontal transport of furniture
- Infinitely adjustable lower extension ensures low loading height



Further advantages in detail



Fits even through a standard-sized door



Can be pulled by any kind of passenger car

Technical Data

Model	HD 18/0-5 Non-brake assisted	HD 18/0-5 Brake assisted	HD 21/0-6 Brake assisted	HD 18/0-5 Brake assisted	HD 21/0-6 Brake assisted	HD 24/0-7 Brake assisted
Payload [kg]	250	250	250	250	250	250
Gross vehicle weight [kg]	750	750	750	1.100	1.100	1.200
Driving license	B	B	B	B96/BE	B96/BE	B96/BE
Dimensions						
Total length: Retracted for manoeuvring [mm] Extended for transport [mm]	4.090 4.890	4.165 4.900	4.165 4.900	4.165 4.900	4.165 4.900	4.165 4.900
Total width: Retracted for manoeuvring [mm] Extended for transport [mm]	870 1.299 ²⁾	890 1.299 ²⁾	890 1.299 ²⁾	890 1.299 ²⁾	890 1.299 ²⁾	890 1.299 ²⁾
Guide rails: Length rail package [mm] Track width [mm]	4.005 540	4.005 540	4.005 540	4.005 540	4.005 540	4.005 540
Extendable from – to [m]	4,1 – 17,8	4,1 – 17,8	4,1 – 20,9	4,1 – 17,8	4,1 – 20,9	4,1 – 23,7
Tow bar	Retractable and removable ball shaped coupling	Rigid, retractable and removable ball shaped coupling	Rigid, retractable and removable ball shaped coupling	Rigid, retractable and removable ball shaped coupling	Rigid, retractable and removable ball shaped coupling	Rigid, retractable and removable ball shaped coupling
Drive unit	Hydraulic unit 230 V, 2,6 kW, or petrol engine ¹⁾	Hydraulic unit 230 V, 2,6 kW	Hydraulic unit 230 V, 2,6 kW	Hydraulic unit 230 V, 2,6 kW, or petrol engine ¹⁾	Hydraulic unit 230 V, 2,6 kW, or petrol engine ¹⁾	Hydraulic unit 230 V, 2,6 kW, or petrol engine ¹⁾

¹⁾ special equipment

²⁾ 1.270 mm mit standard axle

All rights reserved for changes in dimension and construction

The Junior Furniture Lift in detail...



Electrical operation with creeping mode and Stop&Go function



Electric pendant control operation from the base



Electric motor




Petrol engine (optional)



Amply and lockable tool box

Wheels of the head piece
laterally adjustable (optional)

Vertically and horizontally **adjustable**
guide rails – for an extremely smooth
rail and carriage operation

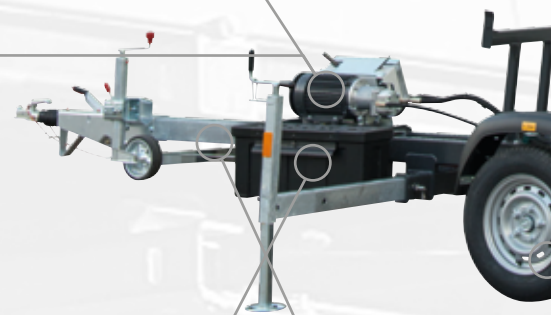

Optimized adjustment of cables
for minimum compression of rail
package even under load

Large flat furniture platform mit
with foldable side panels (90°/180°)
optionally rotatable and extendible



Infinitely adjustable spindle
17-87° (optional)



Multiple adjustable live ring



Contact-free limit switches and
2 m safety-stop



Retractable axle 0.89 m (optional)



Retractable tow bar





Böcker - Løft og tilkomst

JAMAX®
Stillassystemer

JAMAX®
Rullestillas

JAMAX®
Flytebrygger

JAMAX®
Böcker - Løft og tilkomst

Alutec AS
Industrivegen 43
5210 OS

56 30 41 00
info@alutec.no
alutec.no



Böcker Maschinenwerke GmbH
Lippestraße 69-73
D-59368 Werne

+49 (0) 23 89/79 89-0
info@boecker-group.com
www.boecker-group.com